

MIRANDA HOUSE
UNIVERSITY OF DELHI

Date: 16.09.2022


Notice Inviting Quotation


Sealed quotation an invited from the civil working contractors of the College/ CPWD/ Delhi University.
"Providing and fixing Aluminium partition in Robotic laboratory Science Block 2nd Floor"

Publishing Date	19.09.2022 1:00 P.M.
Estimated Cost	46256/-
Quotation Fee	200/- (Bank Draft In favour of Principal, Miranda House.)
Completion Time	20 Days
Quotation Submission Date	27.09.2022
Quotation Opening Date	28.09.2022

- Bids will be opened as per date/time on mentioned above.
- Bidder has down loaded the Quotation from the college website.
- The above Quotation should reach Miranda House College Office by hand on or before 27.09.2022 up to 3:00 p.m.
- The tender fee is non- Replaceable.
- The unit rate for any items should be Quotation inclusive of GST.
- For general rules and directive condition of Contract, the tender shall refer to "CPWD General Condition of Contract – 2014". Except for exception mentioned in this document, which will form a part of the Agreement will up to date correction slips.

The above draft should reach Miranda House, University of Delhi, Delhi 110007 in person on or before 27.09.2022 upto 03.00PM.


Principal

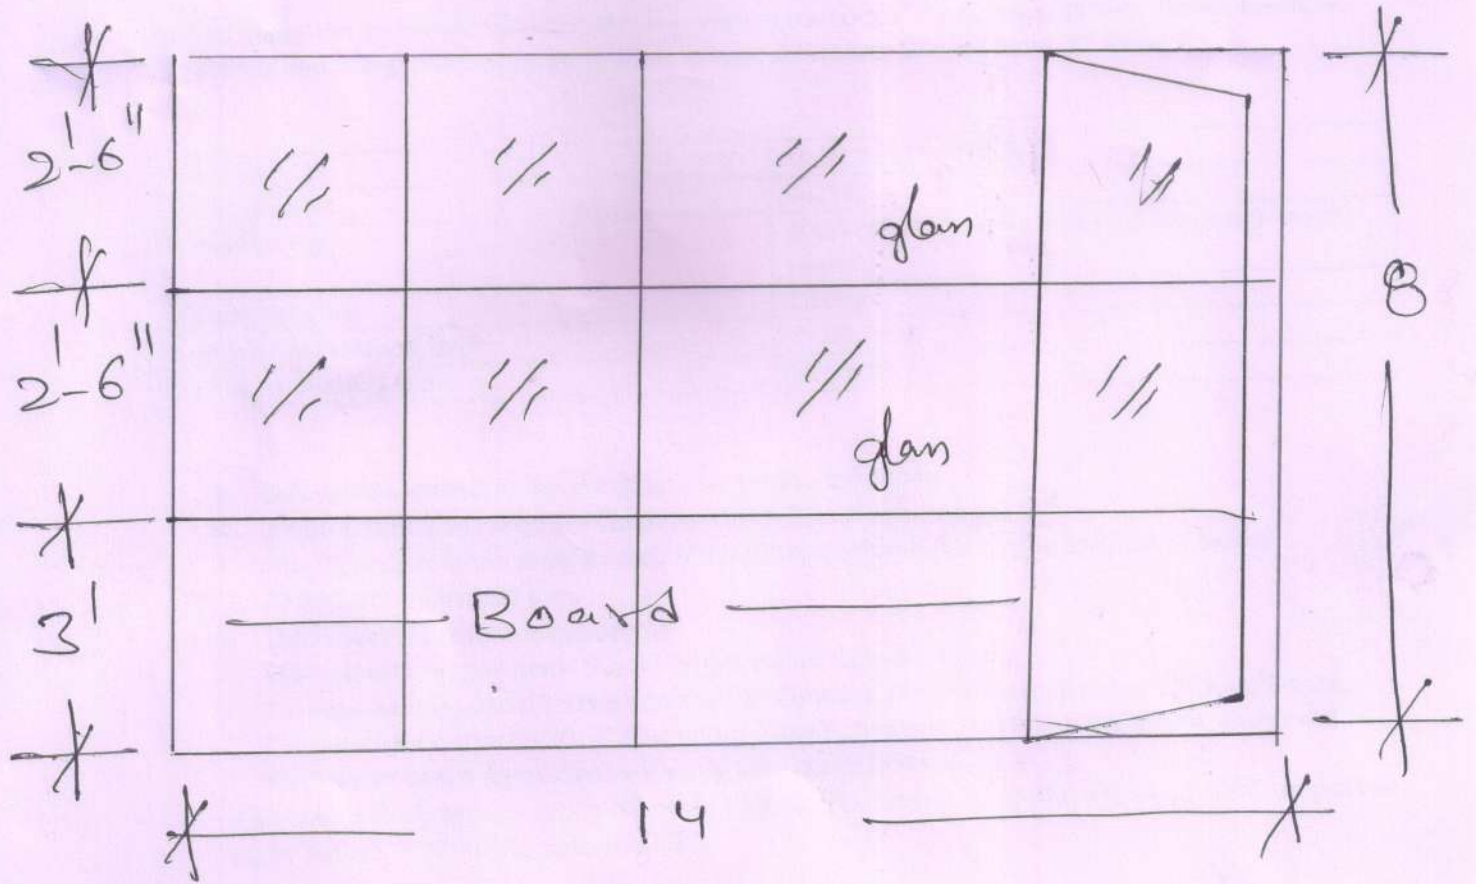

16.9.2022

MIRANDA HOUSE
UNIVERSITY OF DELHI

Quotation

Providing and fixing Aluminium partition in robotic laboratory Science Block 2nd floor

S.no	Items	Qty	Unit	RATE	Amount
1	<p>Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded built up standard tubular sections/ appropriate Z sections and other sections of approved make conforming to IS: 733 and IS: 1285, fixing with dash fasteners of required dia and size, including necessary filling up the gaps at junctions, i.e. at top, bottom and sides with required EPDM rubber/ neoprene gasket etc. Aluminium sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, Aluminium snap beading for glazing / paneling, C.P. brass / stainless steel screws, all complete as per architectural drawings and the directions of Engineer-in-charge. (Glazing, paneling and dash fasteners etc complete. For fixed portion and openable also. 14 Gauge aluminium section with 5 mmthick glass and 15 mm pre-laminated both side board with all fittings etc complete as per existing design. Powder coated aluminium (minimum thickness of powder coating 50 micron)</p>	112	sqft		
				Total	



Aluminium Partition Drawing
& Measurement.

Shiv Kumar